performpipe®

PRE-INSULATED STAINLESS STEEL PIPE SYSTEM

PERFORMLOCK™ FITTING INSTALLATION GUIDE

performlock™
COMPRESSION FITTINGS

SECURE LEAK-FREE CONNECTIONS | **BUILT TO LAST** CORROSION RESISTANT | **RAPID FIT** SAVE TIME ON SITE | **60 YEAR TRUSTED** 60 YEAR GUARANTEE

1

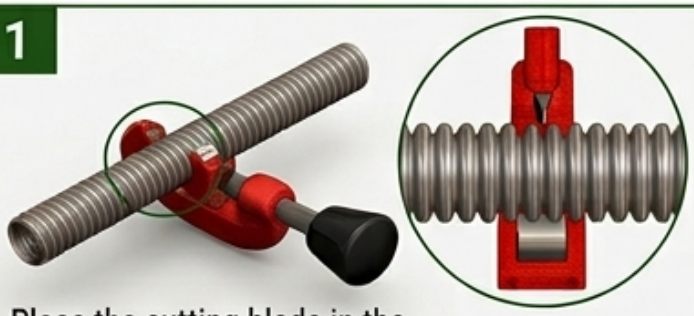

Place the cutting blade in the groove, perpendicular to the pipe, ready for a clean cut.

2

Rotate the cutting tool fully around the pipe to complete the cut.

3

Check the cut to ensure it's clean and free of burrs before fitting.

4

Don't disassemble the fitting. The foot of the inner ring must rest on the fitting body.

5

Manually loosen the nut on the male fitting by half a turn, unless it's already loose.

6

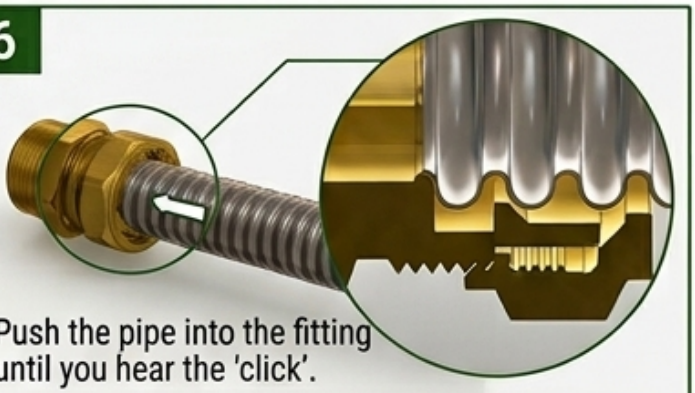

Push the pipe into the fitting until you hear the 'click'.

7

Tighten the nut until you feel resistance. Do not overtighten.

8

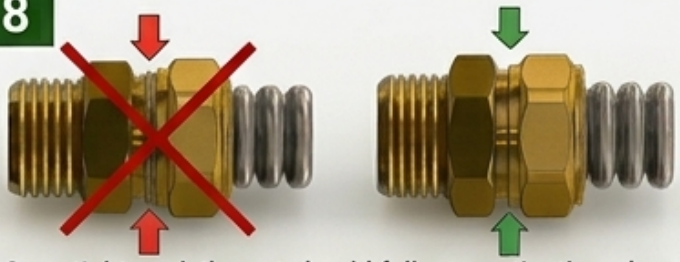

Once tightened, the nut should fully cover the threads on fitting body. If any thread is still visible, keep tightening.

SEAMLESS No joints, No leaks. | **RAPID FIT** Install in a fraction of the time. | **DURABLE** Built for long life performance. | **TRUSTED** Engineered in Italy.

WWW.PERFORM-PIPE.CO.UK